



DATACENTER



E-MEDICAL



INDUSTRY



TRANSPORT



EMERGENCY



ONLINE

Master HP UL

3:3 65-250 kVA



Flywheel compatible



UL certified



SmartGrid ready



Flywheel compatible



Supercaps UPS



Service 1st start

HIGHLIGHTS

- **High efficiency (up to 98.5%)**
- **IGBT-based rectifier technology**
- **Compact and reliable**
- **Galvanic isolation**
- **High overload capacity**
- **North American voltage**

The incredible levels of quality, reliability and energy savings offered by the Master HP range of UPS have been extended to include a 480 Vac - 60 Hz version, certified as UL, with power ratings from 65 to 250 kVA. IT department managers, facility managers and CTOs are under increasing pressure to achieve zero downtime and to size data centre or industrial installations to be flexible in the face of continuous changes and expansion. As the search for the most reliable and efficient power supply system becomes ever-increasingly critical, Riello UPS has been continuously investing in power solutions to meet the demands of a range of our clients; a commitment that resulted in the Master HP UL range.

More than just an innovative and technologically-advanced UPS, it is a leap into the future of three-phase technology.

Thanks to its double conversion on-line technology based entirely on IGBT and digital signal processors (DSP), the Master HP UL range ensures maximum power supply protection and quality for any type of load, IT or industrial, in particular for mission critical applications, with VFI SS 111 classification (Voltage and Frequency Independent) in accordance with IEC EN 62040-3. This range was designed using a new configuration that includes an IGBT sinusoidal input rectifier instead of the conventional thyristor system.

Differently from other UPS technologies available on the market, double conversion technology with galvanic isolated output guarantees a quality power supply that is completely protected from all electrical anomalies at the input. Even in the event of serious power supply problems, the output power remains stable.

Zero impact source

Master HP UL features the added advantages of the Zero Impact Source formula offered by an IGBT-based rectifier assembly. This eliminates problems connected with installation in networks with limited power capacity, where the UPS is supplied by a generator set or in any case anywhere there are compatibility problems with loads that generate current harmonics. Master HP UL has zero impact on the power supply source, whether it is a mains grid or generator set:

- input current distortion < 3%
- input power factor 0.99
- power walk-in function that ensures progressive rectifier start up
- start-up delay function, to restart the rectifiers when mains power is restored if there are several UPS in the system.


Master HP UL also performs the role of a filter and power factor corrector, protecting the upstream power supply from any harmonics and reactive power generated by the consumers.

Battery Care System: maximum battery care

Master HP UL uses the Battery Care System, which optimises battery performance in order to extend the battery life for as long as possible.

Flexibility

The output isolation transformer ensures the galvanic isolation of the load towards the battery and improved versatility in system configuration: it allows for two truly separate network inputs (main and emergency), coming from two different power sources; this is particularly suited to parallel systems in order to ensure selectivity between the two sources, thus improving the reliability of the entire installation.

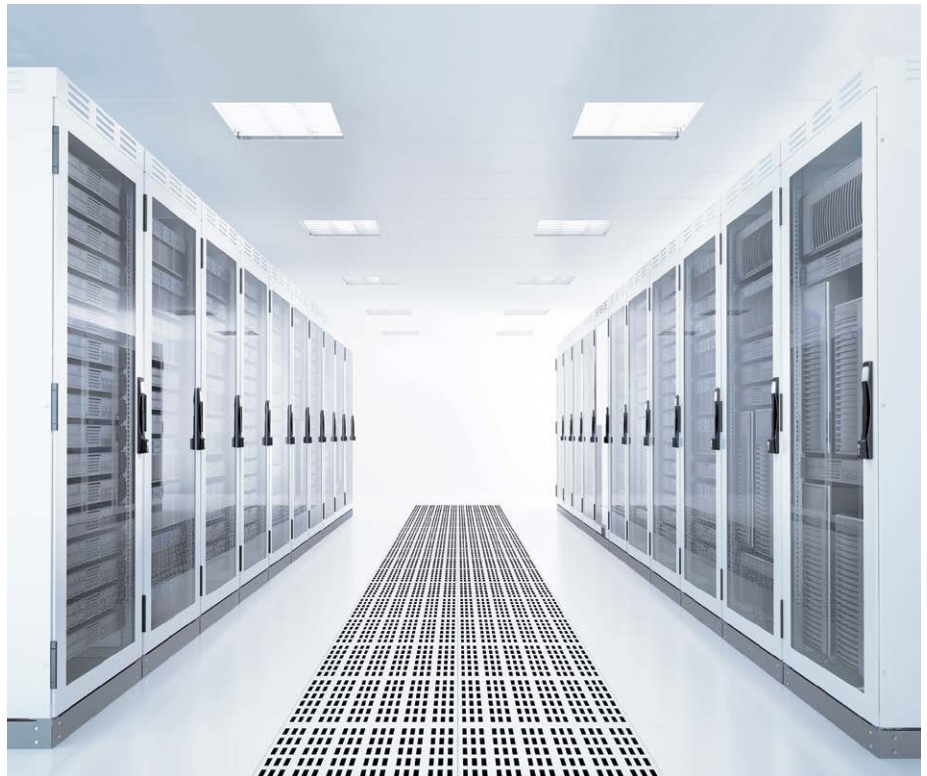

OPTIONS

SOFTWARE

PowerShield³
PowerNetGuard

ACCESSORIES

NETMAN 101 PLUS
NETMAN 102 PLUS
NETMAN 202 PLUS
MULTICOM 301
MULTICOM 302
MULTICOM 351
MULTICOM 352
MULTICOM 401
MULTI I/O
Interface kit AS400
MULTIPANEL
RTG 100


56K MODEM
GSM MODEM

PRODUCT ACCESSORIES

Isolation transformer
Synchronisation device (UGS):
see Master MPS on page 84
Hot connection device (PSI):
see Master MPS on page 84
Generator interface
Parallel configuration kit (Closed Loop)
Battery cabinets empty or for extended runtimes
Top Cable Entry cabinets
IP rating IP31/IP42


DIMENSIONS

MHT UL 65 - MHT UL 80
MHT UL 100 - MHT UL 125




including manual bypass

MHT UL 160 - MHT UL 200
MHT UL 250



excluding manual bypass

MHT UL 160 - MHT UL 200
MHT UL 250



including manual bypass
Top Cable Entry cabinets

MODELS	MHT UL 65	MHT UL 80	MHT UL 100	MHT UL 125	MHT UL 160	MHT UL 200	MHT UL 250
INPUT							
Nominal voltage	480 Vac three-phase + N						
Frequency	45 - 65 Hz						
Power factor	> 0.99						
Harmonic current distortion	<3% THDi						
Soft start	0 - 100% in 30" (selectable)						
Frequency tolerance	± 2% (selectable from ± 1% to ± 5% from front panel)						
Standard equipment provided	Back Feed protection; separable bypass line						
BATTERIES							
Type	VRLA AGM / GEL; NiCd; Li-ion; Supercaps and Flywheel						
Ripple current	Zero						
Recharge voltage compensation	-0.5 Vx°C						
OUTPUT							
Nominal power (kVA)	65	80	100	125	160	200	250
Active power (kW)	58.5	72	90	112.5	144	180	225
Number of phases	3 + N						
Nominal voltage	480 Vac three-phase + N						
Static stability	± 1%						
Dynamic stability	from ± 5% to ± 1% in 20 ms						
Voltage distortion	< 1% with linear load / < 3% with non-linear load						
Crest factor	3:1 lpeak/lrms						
Frequency stability on battery	0.05%						
Frequency	60 Hz						
Overload	110% for 60'; 125% for 10'; 150% for 1'						
INFO FOR INSTALLATION							
Weight (lbs [kg])	1213 [550]	1433 [650]	1544 [700]	2326 [1055] *	2546 [1155] *	2767 [1255] *	
Weight without manual bypass (lbs [kg])	-	-	-	1984 [900]	2205 [1000]	2425 [1100]	
Dimensions (WxDxH) (inches [mm])	31.5 x 33.5 x 75 [800 x 850 x 1900]			55 x 33.5 x 75 [1400 x 850 x 1900] *			
Dimensions without manual bypass (WxDxH) (inches [mm])	-			39 x 33.5 x 75 [1000 x 850 x 1900]			
Remote signals	dry contacts (configurable)						
Remote controls	ESD and bypass (configurable)						
Communications	Double RS232 + dry contacts + 2 slots for communications interface						
Operating temperature	0 °C / +40 °C						
Relative humidity	<95% non-condensing						
Colour	Dark grey RAL 7016						
Noise level at 1 m	65 dBA			68 dBA			
IP rating	IP20 (others on request)						
Smart Active efficiency	up to 98.5%						
Standards	UL Standard 1778: 2nd edition from 65 to 125 kVA, 4th edition from 160 to 250 kVA; National Electrical Code (NFPA-70); NEMA PE-1; CUL - CSA C22.2; ASME; ASA-C-39.1-1984; FCC section 15 subsection J class A; NEC; OSHA; IEEE 587; ANSI C 62.41-1980; ISO 9000						
Classification in accordance with IEC 62040-3	(Voltage Frequency Independent) VFI - SS - 111						
Moving the UPS	transpallet						

* with Top Cable Entry

RPS S.p.A.

LEGNAGO (VR)

Registered office
Viale Europa, 7 ZA1
37045 LEGNAGO (Verona)
Tel +39 0442 635811
Fax +39 0442 629098
www.riello-ups.com
riello@riello-ups.com

CORMANO (MI)

Sales Office
Via Somalia, 20
20032 CORMANO (Milano)
Tel +39 02 663271
Fax +39 02 66327351

ROME

Sales Office
Via Fosso della Magliana, 34/G
00148 ROME
Tel +39 06 65192125
Fax +39 06 65192247



PRE-SALES SUPPORT
(TEC)
tec@riello-ups.com



AFTER-SALES SUPPORT
(UPService)
service@riello-ups.com

RIELLO UPS Ltd. (UK)

Unit 50 Clywedog Road North
Wrexham Industrial Estate
Wrexham LL13 9XN
Tel +44 (0)800 269 394
Fax +44 (0)1978 729 290

CONSTANT POWER SERVICES Ltd. (UK)

Unit 3 - Trust Industrial Estate,
Wilbury Way - Hitchin, Herts, SG4 0UZ
Tel +44 (0)1462 422 955
Fax +44 (0)1462 422 754

RIELLO UPS GmbH (DEUTSCHLAND)

Siemensstraße 12
21465 Reinbek bei Hamburg
Tel +49 (0)40 727 57-06
Fax +49 (0)40 727 57-189

AROS GmbH (DEUTSCHLAND)

Neufahrner Str. 12b
D-85375 Neufahrn/Grüneck
Tel +49 8165 / 9458-0
Fax +49 8165 / 9458-26

RIELLO ENERDATA s.l.u. (ESPAÑA)

C/ Labradores, 13 Parque Empresarial
Prado del Espino
28660 Boadilla del Monte - Madrid
Tel +34 916 333 000
Fax +34 916 321 793

Delegacion Andalucía

C/ Aviación 18, P. I. Calonge,
Edificio Morera y Vallejo 1, 1ª Planta
41007 Sevilla
Tel +34 955 040 044
Fax +34 955 040 041

RIELLO TDL s.l. (ESPAÑA)

C/Berguedà, 6 bis
Pol. Ind. Plà de la Bruguera
08211 Castellar del Vallès, Barcelona
Tel +34 (0)93 74 71 210
Fax +34 (0)93 71 46 562

RIELLO ONDULEURS S.a.r.l. (FRANCE)

2/4 Rue du Bois Chaland,
ZAC du Bois Chaland – 91090 Lisses
Tel +33 (0)1 60 875454
Fax +33 (0)1 60 875450

Agence Rhone Alpes - Sud

147 Avenue M. Mérieux,
Parc de Sacuny, Park Avenir 1
69530 Brignais
Tel +33 (0)4 72 177108
Fax +33 (0)4 78 351422

RIELLO PCI India Pvt. Ltd. (INDIA)

Prime Group Building,
11/5B, Pusa Road, New Delhi - 110 005
Tel +91 11 41 888 999 (30 lines),
Tel +91 11 41 888 888
Fax +91 11 2575 5815

**Riello UPS (Asia) Co., Ltd.
(PEOPLE'S REPUBLIC OF CHINA)**

28F, 500, Fute Dong Er Road,
Waigaoqiao Free Trade Zone,
Pudong District - 200131 Shanghai
Tel +86 21 50464748
Fax +86 21 50464648

Sales office Beijing

No.418, 4F, Block A, Gaode Plaza, 10
Huayuan Dong Road,
Haidian District - Beijing
Tel +86 10 82038861 / 8862
Fax +86 10 82038863

Sales office Guangzhou

Address Unit 1507 East Building,
Dongshan Square, No. 65,
Xianlie Zhong Road, Yuexiu District
510095, Guangzhou
Tel +86 20 28848001
Fax +86 20 28848002

Singapore Rep. office (ASIA PACIFIC)

138, Robinson Road
The corporate office #14-06
068906 Singapore
Tel +65 6323 4131
Fax +65 6323 4212

MARM-UPS Pty Ltd. (AUSTRALIA)

Unit 22/80 Box Road
Taren Point NSW 2229
Tel +61 2 9531 1999
Fax +61 2 9531 1988

Unit 17/810-818 Princes Hwy

Springvale VIC 3171
Tel +61 3 9574 6922
Fax +61 3 9574 6933

PO Box 2251

Yokine South WA 6060
Tel +61 1300 138,709

Follow us on Social Networks

